

Cable and wiring

Model number

- CCFFMA-2M
- CCFFMA-4M
- CCFFMA-6M



Foundation Fieldbus cordsets

These single ended female cordsets allow for quick connection to Foundation Fieldbus devices using a convenient mini (7/8") connector.

- CCFF1MA-2M single ended female cordset (2 meters)
- CCFF1MA-4M single ended female cordset (4 meters)
- CCFF1MA-6M single ended female cordset (6 meters)



Specifications	
Conductors	3x 18AWG; 1x 20AWG (shield)
Insulation material	PVC
Insulation color	Yellow
Coupling nut	Stainless steel
Rated voltage	300 V
Rated current	9.0 A
Contact material/plating	Brass / gold
Shielding	Aluminum / polyester foil
Operating temperature	-40° to +105°C (-40° to +221°F)
Ratings	Meets NEMA 1,3,4,6P and IEC IP67

Pinout drawing




Pins

- 1 FF - (blue)
- 2 FF + (brown)
- 3 Shield (bare)
- 4 Ground (green / yellow)

female (sockets)

Dimensions (mm)

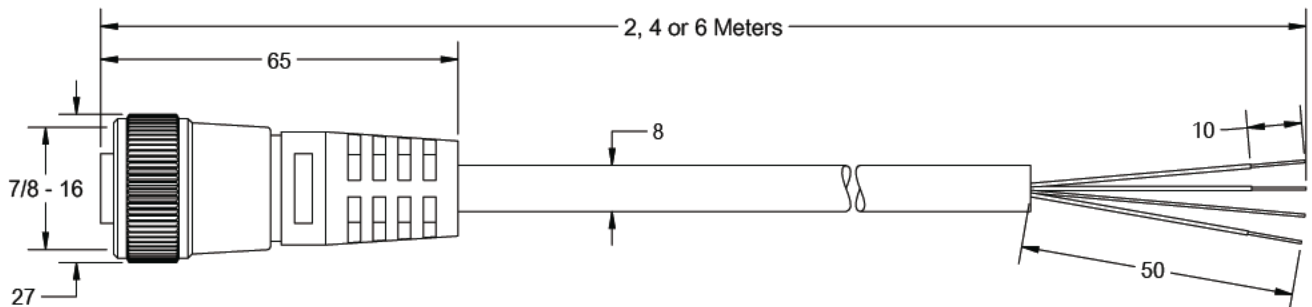



Valmet's professionals around the world work close to our customers and are committed to moving our customers' performance forward – every day.

Valmet Flow Control Oy

Vanha Porvoontie 229
01380 Vantaa, Finland
flowcontrol@valmet.com
+358 10 417 5000
valmet.com/flowcontrol

**Valmet Flow Control Inc.
Stonel product center**

26271 US Hwy 59, Fergus Falls, MN 56537 USA.
Tel. +1 218 739 5774.
sales.stonel@valmet.com
valmet.com/flowcontrol

