

Drop connectors (DIN)

Model number

DR461109A

Passive

DR461074A

Protected



Multi-drop connector/device coupler (4 drops)

Drop connectors provide a reliable, safe method of connecting field devices to the bus cable. Protected drop connectors limit the current passing from the bus to the drop leg to prevent fault conditions on the drop from affecting the bus. DIN rail mounting is standard.

Passive

- 8 amp capacity
- LED indicates bus power

Protected

- Short circuit protection
- LEDs indicate bus power and drop short circuit
- Automatically resets when drop fault is cleared




Passive

Protected


Specifications	
LED displays	Bus power on - green LED Drop short circuit - red LED (protected)
Maximum voltage	35 VDC
Maximum current (trunk)	8 amp
Voltage drop (trunk)	Negligible
Voltage drop (drop)	Passive: negligible Protected: 1 volt maximum
Trip current (drop)	Passive: no trip current Protected: 40mA
Holding current (after trip)	Passive: n/a Protected: 28mA
Reset current level	Current falls below 28mA
Current consumption	2mA
Dimensions (L, W, H)	113mm, 47mm, 68mm
Housing	Engineered resin
Operating temperature	-40° to +80°C (-40° to +176°F)

Schematic drawings

Passive

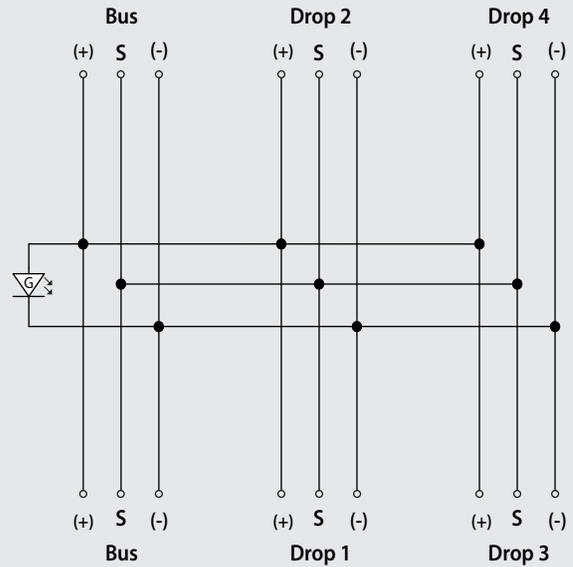

Protected

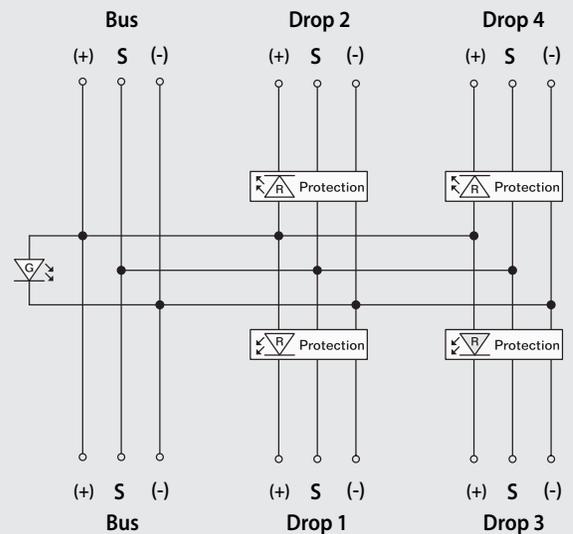

Dimensions (mm)

