

## Masters and gateways

Model number  
GW458114A



### Dual channel AS-Interface to Profibus-DP gateway with single power supply feature

The AS-Interface/Profibus gateway interfaces the AS-Interface to Profibus-DP. The gateway acts as a master for AS-Interface and as a slave for Profibus. AS-Interface functions can be called up via Profibus. Commissioning can be accomplished with a hand-held addressing unit or with the push buttons on the gateway.


#### Features

- AS-Interface peripheral fault diagnostics
- Duplicate address detection
- Version 3.0 master-compatible with all 2.0-3.0 slaves and 7.3 profile analog modules
- Serial diagnostics port: see SW462008A for software and cable
- ETL approved for Class I Division 2
- Single power supply for two (2) networks



Specifications	
AS-Interface master version	3.0
Interface	Profibus-DP
Operating current	250mA
Operating voltage	30 VDC requires (1) 30 VDC power supply
Baud rate	9.6k - 12000k baud (automatic recognition)
AS-Interface cycle time	Cycle time = 150 microsec. x (AS-Interface slaves +2)
Displays	LCD display Display network1/network2, green LED Serial communication active, green LED Configuration error, red LED AS-Interface voltage normal, green LED AS-Interface normal operation, green LED Automatic address program enabled, green LED Master in configuration mode, yellow LED
Operating temperature	0° to +55°C (+32° to +131°F)
Storage temperature	-25° to +85°C (-13° to +185°F)
Housing	Stainless steel, DIN rail mounting
Dimensions (L, W, H)	120mm, 75mm, 83mm
Ingress protection	IP20, field enclosure required
Weight	460g (1.0 pounds)
Approvals	ETL approved Class I Division 2, groups A,B,C,D

### Schematic drawing

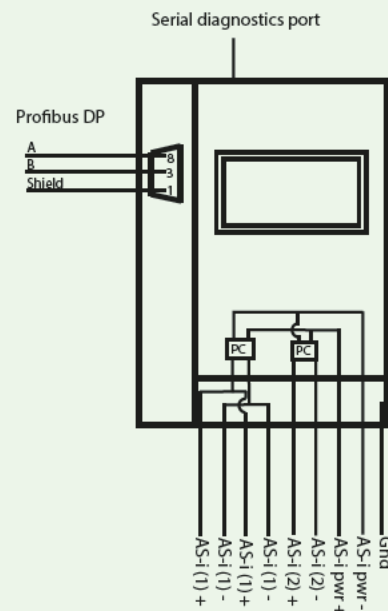

### Graphical display

The interactive graphical display on this gateway enables the entire AS-Interface network to be commissioned and the connected devices to be completely tested without a PC, PLC or host system. It also enables the user to complete all tasks previously requiring the “AS-Interface Control Tools” software package or hand-held. This allows for simpler and faster commissioning.

#### Features

- Set device addresses
- Test inputs and outputs
- Perform network diagnostics
- View error counter





Valmet's professionals around the world work close to our customers and are committed to moving our customers' performance forward – every day.

**Valmet Flow Control Oy**

Vanha Porvoontie 229  
01380 Vantaa, Finland  
flowcontrol@valmet.com  
+358 10 417 5000  
valmet.com/flowcontrol

**Valmet Flow Control Inc.  
Stonel product center**

26271 US Hwy 59, Fergus Falls, MN 56537 USA.  
Tel. +1 218 739 5774.  
sales.stonel@valmet.com  
valmet.com/flowcontrol

